



BVX Series Ready Flanges

1" TO 4" PVC, CPVC AND GFPP

KEY FEATURES

- Ideal for conversion from socket to flange end
- Available in PVC, CPVC and GFPP
- One-Piece Construction
- Integral Molded Spigot End
- Eliminates the Need for an Extra Fabricated Joint – Preventing a Possible Leak Path
- Easily Converts Socket Valves to Flanged
- ANSI / AMSE Class 150 Bolt Pattern / 2" are ANSI / ASME 150 and PN10 Compatible

OPTIONS

- Threaded to Flanged

MATERIALS

- PVC Cell Class 12454 per ASTM D1784
- CPVC Cell Class 23447 per ASTM D1784
- GFPP Cell Class 85580 per ASTM D4101

TECHNICAL INFORMATION


SELECTION CHART

SIZE	MATERIAL	END CONNECTION	PRESSURE RATING
1" – 4" (DN25 – DN100)	PVC and CPVC	Spigot x Flanged	150 PSI @ 70°F Non-Shock
	GFPP	Threaded x Flanged	

BVX Series Ready Flanges

1" TO 4" PVC, CPVC AND GFPP

TECHNICAL INFORMATION, CONTINUED

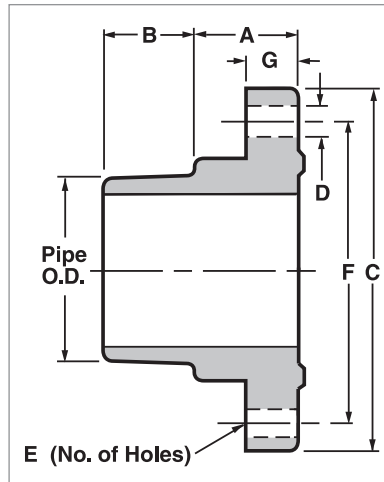


DIMENSIONS

SIZE in / DN	A in / mm	B in / mm	C in / mm	D in / mm	E in / mm	F in / mm	G in / mm	WEIGHT lbs / kg
1 / 25	1.25 / 32	1.19 / 30	4.50 / 114	.56 / 14	4.00 / 102	3.13 / 80	.56 / 14	.50 / .23
1-1/2 / 40	1.50 / 38	1.44 / 37	5.00 / 127	.56 / 14	4.00 / 102	3.88 / 99	.75 / 19	.75 / .34
2 / 50	1.65 / 42	1.54 / 39	6.00 / 152	.75 / 19	4.00 / 102	4.75 / 121	.75 / 19	1.25 / .57
3 / 80	1.98 / 50	1.84 / 47	7.50 / 191	.75 / 19	4.00 / 102	6.00 / 152	1.00 / 25	2.75 / 1.25
4 / 100	2.36 / 60	2.31 / 59	9.00 / 229	.75 / 19	8.00 / 203	7.50 / 191	1.13 / 29	4.50 / 2.04

Dimensions are subject to change without notice – consult factory for installation information

OPERATING PRESSURE/TEMPERATURE

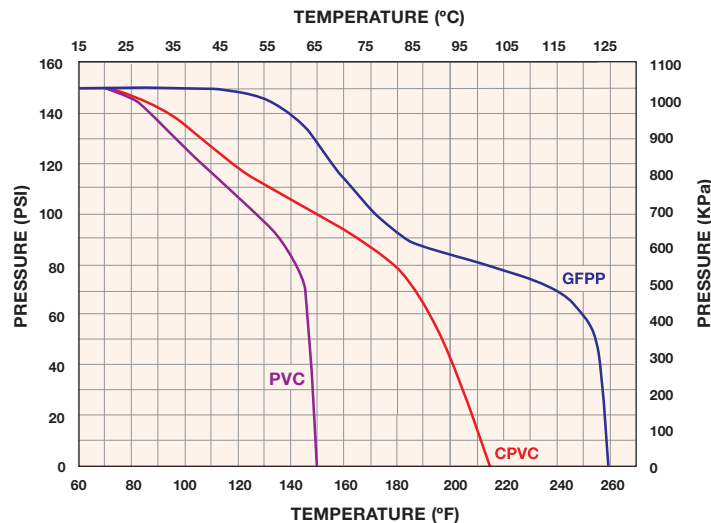

Hayward is a registered trademark of Hayward Industries, Inc. © 2018 Hayward Industries, Inc.

USA: 1.888.429.4635 • Fax: 1.888.778.8410 • One Hayward Industrial Drive • Clemmons, NC 27012 • Email: hfcsales@hayward.com
 Canada: 1.888.238.7665 • Fax: 1.905.829.3636 • 2880 Plymouth Drive • Oakville, ON L6H 5R4 • Email: hflowcanada@hayward.com
 Visit us at: haywardflowcontrol.com