



Certified to
NSF/ANSI 61 & 372

Actuator
Ready

TBH Series with “Z-Ball” True Union Ball Valves

1/2" TO 2" / DN15 TO DN50 PVC AND CPVC

KEY FEATURES & BENEFITS

- Drilled Ball for Sodium Hypochlorite applications
- 250 PSI / 16 Bar, non-shock at 70°F / 23°C full pressure rating
- Consistent operating torque with adjustment-free design
- Lockout/Tagout mechanism that secures directly to valve body for enhanced safety
- Ergonomic black identifiable handle for improved grip and comfort
- ISO mounting flange simplifies actuation
- Permanent markings, eliminates labels
- Integral footpad for skid or panel mount
- FPM seals
- Double O-Ring stem seals
- Reversible PTFE seats – Standard
- Easy replacement for existing Hayward TB-Z Series
- NSF / ANSI 61 and NSF / ANSI 372 Listed

OPTIONS


- Pneumatic or Electric Actuators
- Stem Extensions
- Manual Limit Switch
- Coupling for Actuator

MATERIALS

- PVC per ASTM D1784 Cell Class 12454
- CPVC per ASTM D1784 Cell Class 23447
- GFPP per ASTM D4101 Cell Class 85580 (Handle & Lock Plate)

TECHNICAL INFORMATION

EXPLODED VIEW

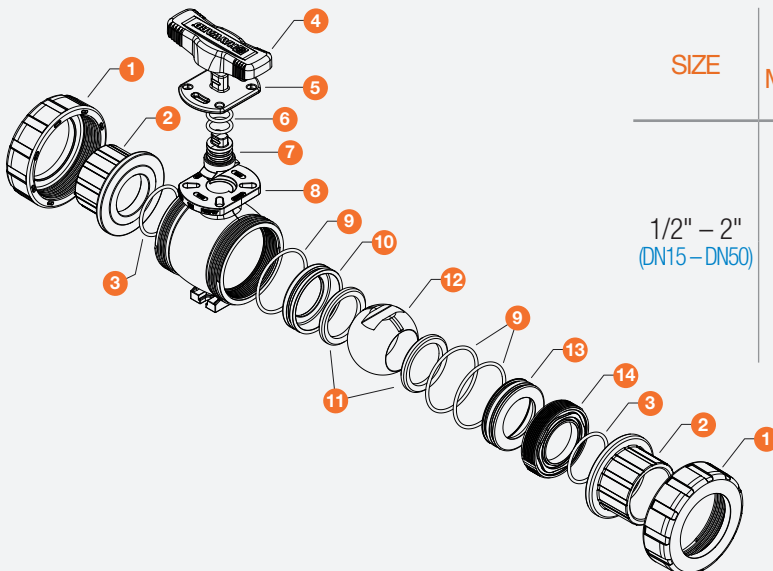

SELECTION CHART

| SIZE | BODY MATERIAL | SEALS | END CONNECTION | PRESSURE RATING |
|----------------------------|----------------|-------|-----------------------|----------------------------------------------|
| 1/2" – 2" (DN15 – DN50) | PVC or CPVC | FPM | Socket or Threaded | 250 PSI @ 70°F 16 Bar @ 21°C Non-Shock |
| | | | Flanged | 150 PSI @ 70°F 10 Bar @ 21°C Non-Shock |

** PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.
PP socket fusion ends per ASTM F2389 and threaded ends per BS21.
Flanged ends available in DIN / EN PN10.

"Patent Pending"


TBH Series with "Z-Ball" True Union Ball Valves

1/2 TO 2" / DN15 TO DN50 PVC AND CPVC

TECHNICAL INFORMATION, CONTINUED

PARTS LIST / 2D DRAWINGS

1. Nut (2)
2. End Connector (2)
3. End Connector O-Ring (2)
4. Handle
5. Lock Plate
6. Stem O-Rings (2)
7. Stem
8. Body
9. Seat Carrier O-Ring (3)
10. Closed End Seat Carrier
11. Seats (2)
12. Ball (drilled)
13. Open End Seat Carrier
14. Seat Retainer

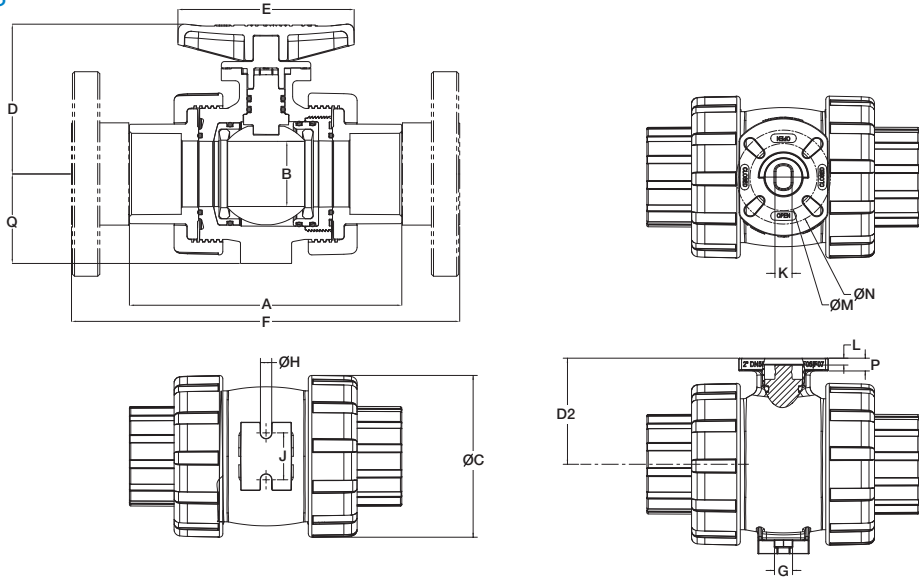

DIMENSIONS – INCHES / MILLIMETERS

| SIZE | A | B | C | D1 | D2 | E | F | G | H | J | K | L | M | N | P | Q |
|-------------|------------|-----------|------------|------------|-----------|------------|-------------|-----------|----------|-----------|-----------|----------|-----------|-----------|----------|-----------|
| inches / DN | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm | in / mm |
| 1/2 / 15 | 4.65 / 118 | 0.53 / 13 | 2.25 / 57 | 2.82 / 72 | 1.75 / 44 | 3.50 / 89 | 6.65 / 169 | 0.45 / 11 | 0.27 / 7 | 0.75 / 19 | 0.50 / 13 | 0.17 / 4 | 1.97 / 50 | N/A | 0.29 / 7 | 1.37 / 35 |
| 3/4 / 20 | 4.79 / 122 | 0.72 / 18 | 2.62 / 67 | 2.98 / 76 | 1.91 / 49 | 3.50 / 89 | 7.17 / 182 | 0.45 / 11 | 0.27 / 7 | 0.75 / 19 | 0.50 / 13 | 0.17 / 4 | 1.97 / 50 | N/A | 0.29 / 7 | 1.56 / 40 |
| 1 / 25 | 5.34 / 136 | 0.94 / 24 | 3.00 / 76 | 3.25 / 83 | 2.18 / 55 | 4.00 / 102 | 8.05 / 204 | 0.45 / 11 | 0.27 / 7 | 1.00 / 25 | 0.50 / 13 | 0.20 / 5 | 1.97 / 50 | N/A | 0.29 / 7 | 1.75 / 44 |
| 1-1/4 / 32 | 6.83 / 173 | 1.48 / 38 | 4.00 / 102 | 3.89 / 99 | 2.60 / 66 | 5.17 / 131 | 9.61 / 244 | 0.53 / 13 | 0.33 / 8 | 1.38 / 35 | 0.50 / 13 | 0.20 / 5 | 1.97 / 50 | 2.76 / 70 | 0.34 / 9 | 2.25 / 57 |
| 1-1/2 / 40 | 7.39 / 188 | 1.48 / 38 | 4.00 / 102 | 3.89 / 99 | 2.60 / 66 | 5.17 / 131 | 10.65 / 271 | 0.53 / 13 | 0.33 / 8 | 1.38 / 35 | 0.50 / 13 | 0.20 / 5 | 1.97 / 50 | 2.76 / 70 | 0.34 / 9 | 2.25 / 57 |
| 2 / 50 | 7.99 / 203 | 1.91 / 49 | 4.75 / 121 | 4.40 / 112 | 3.11 / 79 | 5.17 / 131 | 11.51 / 292 | 0.53 / 13 | 0.33 / 8 | 1.38 / 35 | 0.50 / 13 | 0.20 / 5 | 1.97 / 50 | 2.76 / 70 | 0.34 / 9 | 2.63 / 67 |

* 1-1/4" and 1-1/2" are 0.56" (14mm) longer than TB Series.

** Dimensions are subject to change without notice - consult factory for installation information.

WEIGHT – LBS / KG

| SIZE | Weight with Socket/Threaded Ends | | Weight with Flanged Ends | |
|------------|----------------------------------|-------------|--------------------------|-------------|
| | lbs / kg | lbs / kg | lbs / kg | lbs / kg |
| 1/2 / 15 | 0.70 / 0.32 | 1.12 / 0.51 | 0.59 / 0.27 | 1.01 / 0.46 |
| 3/4 / 20 | 0.90 / 0.41 | 1.50 / 0.68 | 0.79 / 0.36 | 1.39 / 0.63 |
| 1 / 25 | 1.18 / 0.54 | 1.98 / 0.90 | 1.05 / 0.48 | 1.85 / 0.84 |
| 1-1/4 / 32 | 2.57 / 1.17 | 3.51 / 1.59 | 2.32 / 1.05 | 3.26 / 1.48 |
| 1-1/2 / 40 | 2.62 / 1.19 | 3.82 / 1.73 | 2.37 / 1.08 | 3.57 / 1.62 |
| 2 / 50 | 3.87 / 1.76 | 6.37 / 2.89 | 3.62 / 1.64 | 6.12 / 2.78 |

CV VALUES

| SIZE | Cv VALUES |
|------------|-----------|
| 1/2 / 15 | 8.0 |
| 3/4 / 20 | 16.0 |
| 1 / 25 | 29.0 |
| 1-1/4 / 32 | 75.0 |
| 1-1/2 / 40 | 90.0 |
| 2 / 50 | 150.0 |

PRESSURE LOSS CALCULATION FORMULA


$$\Delta P = \left[\frac{Q}{Cv} \right]^2$$

ΔP = Pressure Drop

Q = Flow in GPM

Cv = Flow Coefficient

PRESSURE / TEMPERATURE CHART*

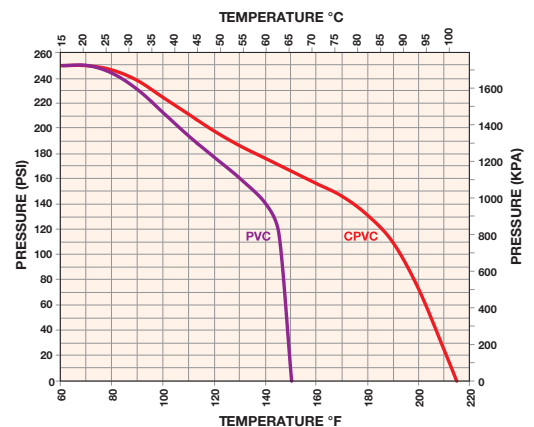

* Flanged valves rated to 150 PSI at 70°F non-shock



Hayward is a registered trademark of Hayward Industries, Inc. © 2019 Hayward Industries, Inc.

USA: 1.888.429.4635 • Fax: 1.888.778.8410 • One Hayward Industrial Drive • Clemmons, NC 27012 • Email: hfcsales@hayward.com
 Canada: 1.888.238.7665 • Fax: 1.905.829.3636 • 2880 Plymouth Drive • Oakville, ON L6H 5R4 • Email: hfcanada@hayward.com
 Visit us at: haywardflowcontrol.com